




鋰電池單面雙層間隔極板塗佈機 / 多功能實驗機

LITHIUM ION BATTERY SINGLE-SIDED AND TWO SEPARATED SLOT DIES SIMULTANEOUS COATING MACHINE / MULTIFUNCTION PILOT COATER

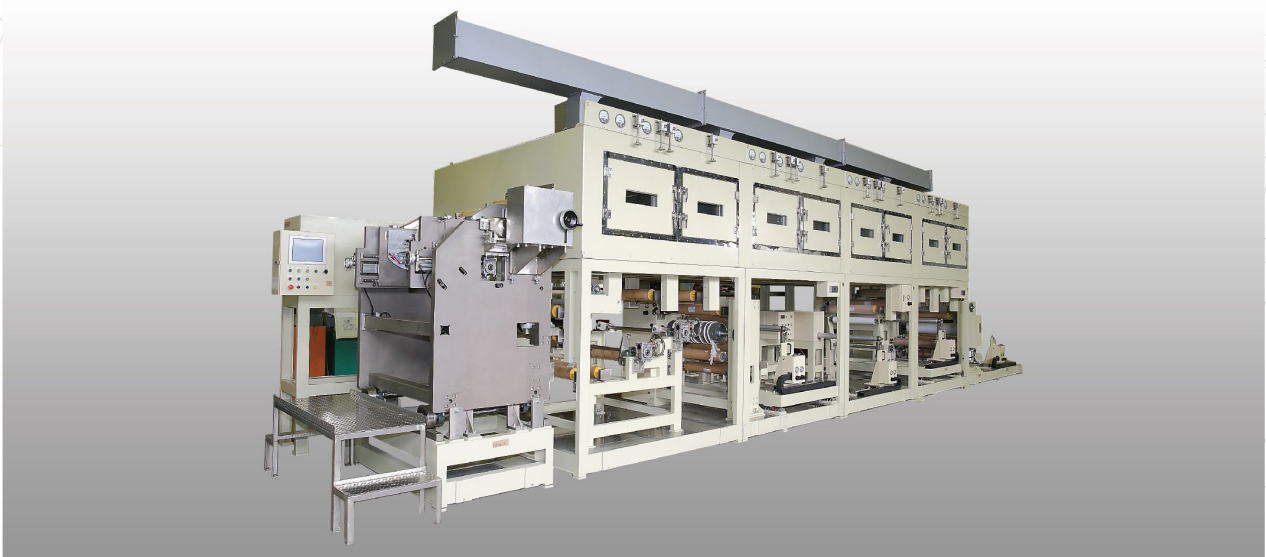

規格 / SPECIFICATION

基材 Base Material	▶	銅箔 Copper Foil (7~35 μ m)、鋁箔 Aluminum Foil (12~35 μ m) PET Film、PC Film
機速 Mechanical Speed	▶	0.1~30 M/min
塗佈方式 Coating Method	▶	Slot Die連續式(Max. 620 mm)、Slot Die 間歇式、 雙層Slot Die (Max. 600 mm)、Comma (Max. 620 mm)、 Micro Gravure (全幅寬)
塗佈精度 Coating Accuracy	▶	(dry) 150 μ m \pm 2 μ m (雙面塗佈 Double-sided Coating) 雙面雙次塗佈對位誤差 \pm 0.5mm Alignment Accuracy for Double-sided and Double Coatings is \pm 0.5 mm.
加熱方式 Heating Method	▶	電加熱 / Electric heating
烘箱型式 Oven Type	▶	空浮式 / Air floatation type
烘箱溫度 Oven Temperature	▶	50 - 200 $^{\circ}$ C
乾燥方式 Drying Method	▶	紅外線 / IR (Infrared) 紫外線 / UV (Ultraviolet) 熱風 / Hot Air
貼合功能 Laminating Function	▶	貼合溫度 / Laminator temperature ▶ Max. 220 $^{\circ}$ C
潔淨度 Cleaness	▶	Class 1000

